

CHARACTERISTICS

- Standard (Polyamide 6.6), to cover majority of indoor applications
- Multiple lengths and 6 typical widths with a tensile strength up to 250lbs (114kg), to cover the most demanding applications
- Packaging: OEM bulk quantities in recyclable polythene bags
- Also available in small bags with Euroslot and in workbench boxes



TECHNICAL INFORMATION

Material: UL approved Polyamide 6.6

Op Temp Rating: -40°C to +85°C (-40°F to 185°F)

Minimum installation temp: -20°C (-4°F)

Color: Natural and black


Flammability rating: UL 94 V-2

Other properties: Halogen free



Proposition 65: All sizes of cable ties meet Prop 65 requirements

Product Code	Length		Width		Max Bundle		Min. Tensile Strength		Pack Quantity
	[mm]	[in]	[mm]	[in]	[mm]	[in]	[kgs]	[lbs]	[pc]
HQCT7BL/HQCT7N	190	7.5	4.8	0.19	46	1.8	22.2	50	100/1000
HQCT11BL/HQCT11N	280	11.0	4.8	0.19	70	2.8	22.2	50	100/1000
HQCT36BL/HQCT36N	920	36.2	9.0	0.35	263	10.4	79.4	175	50/100
HQCT48BL/HQCT48N	1220	48.0	9.0	0.35	362	14.4	79.4	175	50/100

PACKAGING

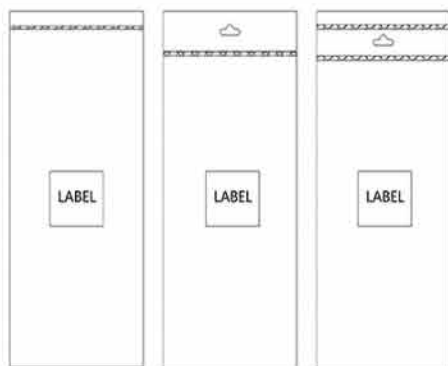

Standard Euroslot with single-line Euroslot with double-line

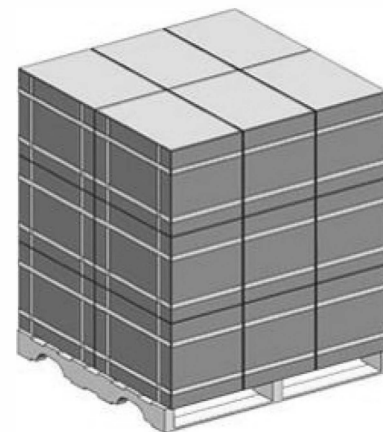

Inner Bag:

- 1: Standard
- 2: Euroslot with single-line
- 3: Euroslot with double-line

Carton Size (L x W x H):

39.4in x 8in x 4.7in 1000mm x 200mm x 120mm

Pallet Size - Loaded (L x W x H):

48in x 40in x 39in
1220mm x 1020mm x 990mm